

# E-1608

## 16-Bit Multifunction Ethernet® DAQ Device



### Features

- 16-bit high-speed Ethernet device
- Sample rates up to 250 kS/s
- 4 differential (DIFF) or 8 single-ended (SE) analog inputs
- Two 16-bit analog outputs
- Eight individually-configurable digital I/O lines
- One 32-bit counter input
- Includes a built-in 10/100 BASE-T auto-negotiation, high-speed communication port.
- Requires a TCP/IP and UDP connection to a network or computer
- Includes CAT-6 Ethernet cable and 5 V power supply adapter (required to provide external power)
- Available with enclosure and screw terminals, or as a board-only OEM version with header connectors (no case, CD, network cable, or power adapter included)



The E-1608 offers four differential or eight single-ended analog inputs, two analog outputs, eight digital I/O, and one event counter input.

### Software

#### Supported Operating Systems

- Windows 8/7/Vista® 32/64-bit
  - Universal library (UL), ULx for NI LabVIEW™
- Android™
  - UL for Android

#### Ready-to-Run Applications

- InstaCal™ (install, configure, and test)
- DAQami™ (acquire, view, and log) available for purchase
- TracerDAQ® (acquire, view, log, and generate)

#### Supported Programming Environments

- Visual Studio® and Visual Studio .NET, including examples for Visual C++®, Visual C#®, Visual Basic®, and Visual Basic .NET, and other IDEs
- Java® (Android only) including examples and demo apps
- LabVIEW (Windows only)
- DASyLab®

### Overview

The Ethernet-based E-1608 is a low-cost, high-speed, multifunction I/O DAQ device that measures eight analog channels at 250 kS/s aggregate with 16-bit resolution.

This device also offers two analog outputs, eight digital I/O channels, and one counter input.

### Ethernet Interface

The E-1608 has a built-in 10/100 BASE-T auto-negotiation, high-speed communication port. The networking protocols are TCP/IP and UDP.

Once connected to the network, the device can be remotely accessed and configured through software from anywhere on the network. Only one user at a time can access the E-1608.

Software is required to actively communicate with the E-1608 over Ethernet. The device does not operate as a stand-alone data logger.

### Analog Input

The E-1608 provides 16-bit analog inputs that are software-selectable as four DIFF or eight SE inputs. The device supports input ranges of  $\pm 10$  V,  $\pm 5$  V,  $\pm 2$  V, and  $\pm 1$  V that are software-selectable per channel.

### Analog Output

The E-1608 has two 16-bit, software-paced analog outputs that can be updated at a rate of 500 S/s. The output range is fixed at  $\pm 10$  V.


### Trigger Input

The E-1608 has an external digital trigger input. The trigger mode is software-selectable for edge- or level-sensitive mode. You can configure edge-sensitive mode for either rising or falling edge. In level-sensitive mode, you can configure for either high or low level. The default setting at power up is edge-sensitive, rising edge.



# E-1608

## General Information

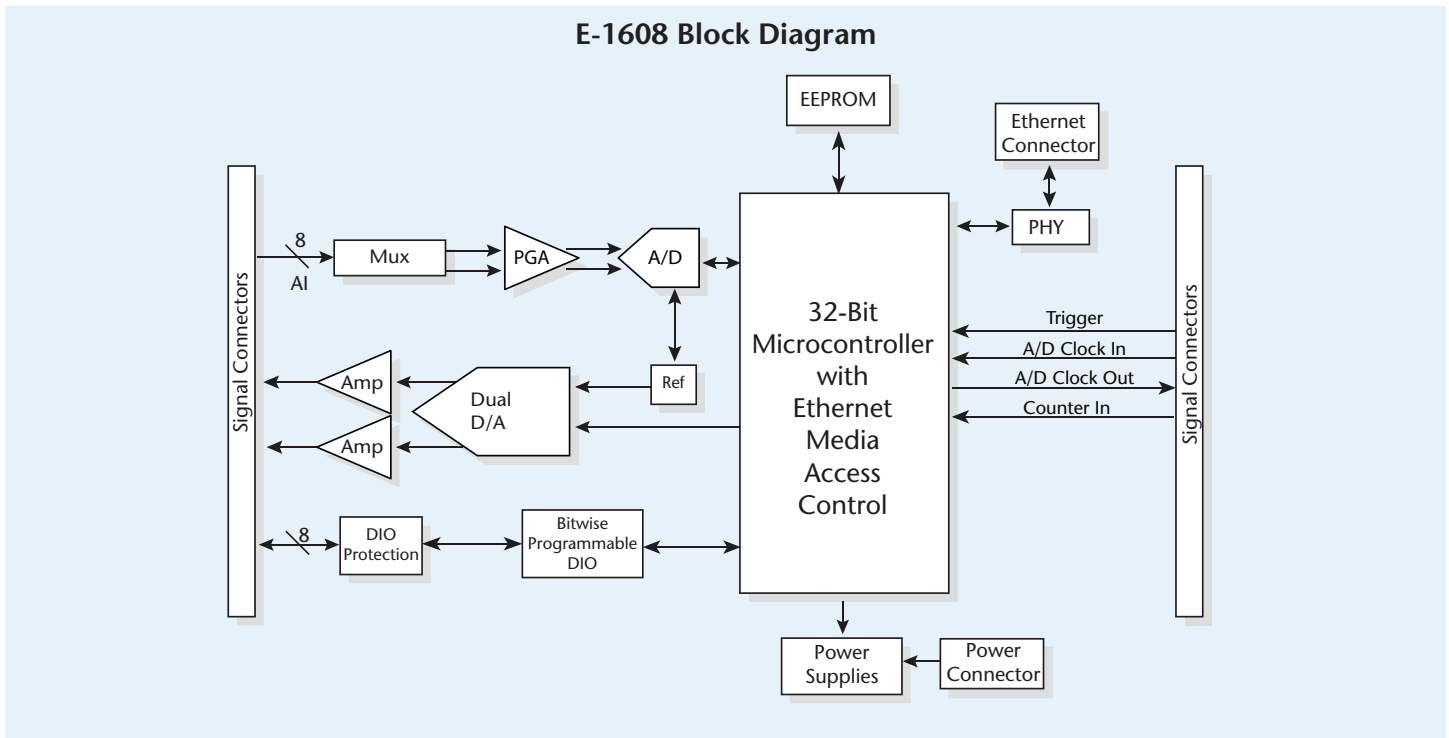

### Digital I/O

Eight bidirectional digital I/O bits are individually-configurable for input or output. The digital I/O terminals can detect the state of any TTL-level input. You can configure for pull-up (+5 V) or pull-down (0 V) with an onboard jumper.

### Counter Input

One 32-bit event counter can count TTL pulses. The counter accept inputs of up to 10 MHz.

### Clock I/O

The E-1608 has one external clock input and one clock output for analog inputs.

### Calibration

E-1608 devices are factory-calibrated. Specifications are guaranteed for one year. For calibration beyond one year, return the device to the factory for recalibration.

### E-1608-OEM Version

The E-1608-OEM has a board-only form factor with header connectors for OEM and embedded applications (no case, CD, or network cable included). All devices can be further customized to meet customer needs.



*The E-1608-OEM has the same specifications as the standard device, but in a board-only form factor with header connectors instead of screw terminals.*



# E-1608

## Specifications

### Specifications

These specifications apply to both standard and OEM versions unless noted otherwise.

#### Analog Input

**A/D Converter Type:** Successive approximation

**ADC Resolution:** 16 bits

**Number of Channels:** 4 differential, 8 single-ended (software-selectable)

**Input Voltage Range:**  $\pm 10$  V,  $\pm 5$  V,  $\pm 2$  V,  $\pm 1$  V (software-selectable per channel)

**Absolute Max Input Voltage (CHx relative to AGND):**  $\pm 20$  V max (power on),  $\pm 12$  V max (power off)

**Input Impedance:** 1 G $\Omega$  (power on), 1200  $\Omega$  (power off)

**Input Bias Current:**  $\pm 10$  nA

**Input Bandwidth (All Input Ranges, Small Signal (-3 dB)):** 700 kHz

**Input Capacitance:** 60 pF

**Max Working Voltage (Signal + Common Mode)**

**$\pm 10$  V Range:**  $\pm 10.2$  V max relative to AGND

**$\pm 5$  V Range:**  $\pm 10.2$  V max relative to AGND

**$\pm 2$  V Range:**  $\pm 9.5$  V max relative to AGND

**$\pm 1$  V Range:**  $\pm 9.0$  V max relative to AGND

**Common Mode Rejection Ratio ( $f_{IN} = 60$  Hz, All Input Ranges):** 86 dB

**Crosstalk (Adjacent Differential Mode Channels, DC to 10 kHz):** -75 dB

**Input Coupling:** DC

**Sample Rate:** 0.019 Hz to 250 kHz, software-selectable

**Trigger Source:** TRIG (see [External Trigger](#))

**Sample Clock Source:** Internal A/D clock or external A/D clock (AICKI pin)

**Internal Sample Clock Stability:**  $\pm 50$  ppm

**Internal Sample Clock Timebase:** 80 MHz timer with 32-bit period (available frequencies are 80 MHz / integer period)

#### Throughput

This is the typical throughput when the device and host are both connected by Ethernet to the same local network. The throughput can vary significantly if a wireless connection is involved or data is sent over the internet and is not guaranteed

**Software Paced:** 1000 to 5000 S/s typ, on local network

**Hardware Paced:** 250 kS/s max

**Channel Gain Queue (Up To 8 Elements):** Software-selectable channel and range for each queue element

**Warm-Up Time:** 15 minutes min

### Noise Performance

For the peak-to-peak noise distribution test, a differential input channel is connected to AGND at the input terminal block, and 16384 samples are acquired at the maximum rate available at each setting.

Range	Counts	LSBrms
$\pm 10$ V	6	0.91
$\pm 5$ V	6	0.91
$\pm 2$ V	7	1.06
$\pm 1$ V	9	1.36

### Settling Time

Settling time is defined as the accuracy that can be expected after one conversion when switching from a channel with a DC input at one extreme of full scale to another channel with a DC input at the other extreme of full scale. Both input channels are configured for the same input range.

Range	4 $\mu$ s Settling Accuracy (% FSR)	6 $\mu$ s Settling Accuracy (% FSR)	10 $\mu$ s Settling Accuracy (% FSR)
$\pm 10$ V	0.0061	0.0031	0.0015
$\pm 5$ V	0.0061	0.0031	0.0015
$\pm 2$ V	0.0061	0.0031	0.0015
$\pm 1$ V	0.0061	0.0031	0.0015

### Analog Output

**Number Of Channels:** 2

**Resolution:** 16 bits

**Output Ranges (Calibrated):**  $\pm 10$  V

#### Output Transient

**Powered On**

**Duration:** 5 ms

**Amplitude:** 2 V p-p

**Powered Off**

**Duration:** 400 ms

**Amplitude:** 10 V p-p

**Differential Non-Linearity (16-bit Monotonic):**

$\pm 0.35$  LSB typ,  $\pm 1$  LSB max

**Output Current (AOUTx Pins):**  $\pm 3.5$  mA max

Leave unused AOUTx output channels disconnected

**Output Coupling:** DC

**Power On and Reset State:** DACs cleared to uncalibrated zero-scale: 0 V,  $\pm 50$  mV unless the alarm function is enabled for the output.

AOUTx defaults to 0 V whenever the device is powered on or a reset command is issued to the device, unless the alarm functionality is enabled for the output.

#### Alarm Functionality

Either or both outputs may be configured to go to defined values when an Ethernet connection with a host is established or lost.

**Slew Rate:** 5 V/ $\mu$ s

**Throughput (Software Paced):** 1000 to 5000 S/s typ, on local network

This is the typical throughput when the device and host are both connected by Ethernet to the same local network. The throughput can vary significantly, and typical throughput is not guaranteed if a wireless connection is involved or data is sent over the internet.

### Calibrated Absolute Accuracy (Analog Output)

**Range:**  $\pm 10$  V

**Absolute Accuracy:** ( $\pm 18.7$  LSB)

### Calibrated Absolute Accuracy Components (Analog Output)

**Range:**  $\pm 10$  V

**% of Reading:**  $\pm 0.024$

**Offset:**  $\pm 2.2$  mV

**Offset Tempco:** 30.1  $\mu$ V/ $^{\circ}$ C

**Gain Tempco:** 13.2 ppm of range/ $^{\circ}$ C

### Relative Accuracy (Analog Output)

**Range:**  $\pm 10$  V

**Relative Accuracy (INL):**  $\pm 4.0$  LSB typ

### Accuracy

#### Analog Input DC Voltage Measurement Accuracy (All Values are $\pm$ )

Range	Gain Error (% of Reading)	Offset Error	INL Error (% of Range)	Absolute Accuracy at Full Scale	Gain Temperature Coefficient (% Reading/ $^{\circ}$ C)	Offset Temperature Coefficient
$\pm 10$ V	0.024	915 $\mu$ V	0.0076	4075 $\mu$ V	0.0014	47 $\mu$ V/ $^{\circ}$ C
$\pm 5$ V	0.024	686 $\mu$ V	0.0076	2266 $\mu$ V	0.0014	24 $\mu$ V/ $^{\circ}$ C
$\pm 2$ V	0.024	336 $\mu$ V	0.0076	968 $\mu$ V	0.0014	10 $\mu$ V/ $^{\circ}$ C
$\pm 1$ V	0.024	245 $\mu$ V	0.0076	561 $\mu$ V	0.0014	5 $\mu$ V/ $^{\circ}$ C



PLCs



Acquisition



Instruments



Data logger



Power



HMIs



Switches



Motion



Sensors



Converters



Keyboards



SCADA



Telemetry

# E-1608

## Specifications

### Analog Input/Output Calibration

**Recommended Warm-Up Time:** 15 minutes min  
**Calibration Method:** Factory  
**Calibration Interval:** 1 year (factory calibration)

### Digital Input/Output

**Digital Type:** 5 V TTL input/advanced BiCMOS output

**Number of I/O:** 8

**Configuration:** Independently-configured for input or output

**Pull-Up Configuration:** All pins pulled up to 5 V using 47 K resistors (default). Can be changed to pull-down using an internal jumper.

**Digital I/O Transfer Rate (System-Paced):** 100 to 5000 port reads/writes or single bit reads/writes per second typ, on local network

This is the typical throughput when the device and host are both connected by Ethernet to the same local network. The throughput can vary significantly, and typical throughput is not guaranteed if a wireless connection is involved or data is sent over the internet.

**Alarm Functionality:** Any combination of DIO bits may be configured to become outputs and go to defined values when an Ethernet connection with a host is established or lost.

**Power On and Reset State:** All bits are input unless the alarm functionality is enabled for them.

**Input High Voltage Threshold:** 2.0 V min

**Input High Voltage Limit:** 5.5 V absolute max

**Input Low Voltage Threshold:** 0.8 V max

**Input Low Voltage Limit:** -0.5 V absolute min, 0 V recommended min

**Output High Voltage:** 3.8 V typ at no load, 3.0 V min (IOH = -3 mA), 2.0 V min (IOH = -32 mA)

**Output Low Voltage:** 0.15 V typ at no load, 0.55 V max (IOL = 64 mA)

**Power On and Reset State:** Input

### External Trigger

**Trigger Source (External Digital):** TRIG

**Trigger Mode:** Software-selectable edge or level sensitive; user configurable for CMOS-compatible rising or falling edge, high or low level

**Trigger Latency:** 2  $\mu$ s + 1 pacer clock cycle max

**Trigger Pulse Width:** 1  $\mu$ s min

**Input Type:** Schmitt trigger, 47 k $\Omega$  pull-down to ground

**Schmitt Trigger Hysteresis:** 1.01 V typ, 0.6 V min, 1.5 V max

**Input High Voltage Threshold:** 2.43 V typ, 1.9 V min, 3.1 V max

**Input High Voltage Limit:** 5.5 V absolute max

**Input Low Voltage Threshold:** 1.42 V typ, 1.0 V min, 2.0 V max

**Input Low Voltage Limit:** -0.5 V absolute min, 0 V recommended min

### External Clock Input/Output

**Terminal Names:** AICKI, AICKO

**Terminal Types**

**AICKI:** Input (receives A/D pacer clock from external source)

**AICKO:** Output (outputs internal A/D pacer clock)

**Input Clock Rate:** 250 kHz max

**Clock Pulse Width**

**AICKI:** 1  $\mu$ s min

**AICKO:** 1.8  $\mu$ s min

**Clock Mode:** Edge-sensitive, rising

**Input Type:** Schmitt trigger, 47 k $\Omega$  pull-down to ground

**Schmitt Trigger Hysteresis:** 1.01 V typ, 0.6 V min, 1.5 V max

**Input High Voltage Threshold:** 2.43 V typ, 1.9 V min, 3.1 V max

**Input High Voltage Limit:** 5.5 V absolute max

**Input Low Voltage Threshold:** 1.42 V typ, 1.0 V min, 2.0 V max

**Input Low Voltage Limit:** -0.5 V absolute min, 0 V recommended min

**Output High Voltage:** 4.4 V min (IOH = -50  $\mu$ A), 3.80 V min (IOH = -8 mA)

**Output Low Voltage:** 0.1 V max (IOL = 50  $\mu$ A), 0.44 V max (IOL = 8 mA)

### Counter

**Pin Name:** CTR

**Counter Type:** Event counter

**Number of Channels:** 1

**Input Type:** Schmitt trigger, 47 k $\Omega$  pull-down to ground

**Input Source:** CTR screw terminal

**Resolution:** 32 bits

**Schmitt Trigger Hysteresis:** 1.01 V typ, 0.6 V min, 1.5 V max

**Input High Voltage Threshold:** 2.43 V typ, 1.9 V min, 3.1 V max

**Input High Voltage Limit:** 5.5 V absolute max

**Input Low Voltage Threshold:** 1.42 V typ, 1.0 V min, 2.0 V max

**Input Low Voltage Limit:** -0.5 V absolute min, 0 V recommended min

**Input Frequency:** 10 MHz max

**High Pulse Width:** 50 ns min

**Low Pulse Width:** 50 ns min

### Memory

**Data FIFO (Analog Input):** 49,152 samples

**Non-Volatile Memory:** 2,048 bytes (768 bytes for calibration, 256 bytes for user, 1,024 bytes for network settings)

### Power

**External Power Supply:** 5V, 1A

**Supply Current (Quiescent Current):** 330 mA typ\*, 710 mA max including all external loading

**User Output Voltage Range (Available at +VO Terminal):** 4.40 V min to 5.25 V max, assumes supplied AC adapter is used

**User Output Current (Available at +VO Terminal):** 10 mA max

### Network

#### Ethernet Connection

**Ethernet Type:** 100 Base-TX, 10 Base-T

**Communication Rates:** 10/100 Mbps, auto-negotiated

**Connector:** RJ-45, 8 position

**Cable Length:** 100 meters max

**Additional Parameters:** HP Auto-MDIX support

\* This is the total quiescent current requirement for the device that includes the LEDs. This does not include any potential loading of the digital I/O bits, +VO terminal, or the AOUTx outputs.

### Network Interface

**Protocols Used:** TCP/IP (IPv4 only), UDP

**Network Ports Used:** UDP:54211 (discovery), UDP:6234 (bootloader only), TCP:54211 (commands), TCP:54212 (scan data)

**Network IP Configuration:** DHCP + link-local, DHCP, static, link-local

**Network Name:** E-1608-xxxxxx, where xxxxxx are the lower 6 digits of the device MAC address

**Network Name Publication:** By NBNS (responds to b-node broadcasts, therefore only available on the local subnet)

### Network Factory Default Settings

**Factory Default IP Address:** 192.168.0.101

**Factory Default Subnet Mask:** 255.255.255.0

**Factory Default Gateway:** 192.168.0.1

**Factory Default DHCP Setting:** DHCP + link-local enabled

### Network Security

**Security Implementation:** TCP sockets are not opened unless application sends the correct PIN code (stored in non-volatile memory, may be changed by user, default value 0000)

**Number of Concurrent Sessions:** 1

**Vulnerabilities:** TCP Sequence Number Approximation Vulnerability

### LED Displays and the Factory Reset Button

**Power LED (Top)**

3.3 V < V<sub>ext</sub> < 5.9 V: On

V<sub>ext</sub> < 3.3 V, V<sub>ext</sub> > 5.9 V: Off (power fault)

**Activity LED (Bottom):** On when there is a valid host connection and blinks when a command is received or an AnScan is running.

**Ethernet Connector LEDs**

**Left, Green:** Link/activity indicator; on when there is a valid Ethernet link and blinks when network activity is detected.

**Right, Yellow:** Speed indicator; on for 100 Mbps, off for 10 Mbps or no link.

**Factory Reset Button:** Used to reset the network configuration settings to the factory default values.

### Environmental

**Operating Temperature Range:** 0 °C to 55 °C max

**Storage Temperature Range:** -40 °C to 85 °C max

**Humidity:** 0% to 90% non-condensing max

### Mechanical

**Dimensions (L × W × H)**

**Standard Version:** 117.9 × 82.8 × 29.0 mm (4.64 × 3.26 × 1.14 in.)

**OEM Version:** 98.30 × 76.71 × 14.61 mm (3.87 × 3.02 × 0.575 in.)

### Screw Terminal Connectors (E-1608 Standard)

**Connector Type:** Screw terminal

**Wire Gauge Range:** 16 AWG to 30 AWG

### Header Connectors (E-1608-OEM)

**I/O Connector Type:** Two 2 × 8 pin 0.1 in. pitch headers labeled W2 and W4

**Power Connector Type:** DC barrel input jack labeled 4 (mates with 5.5 mm OD / 2.1 mm ID plug) and 1 × 2 pin 0.1 in. pitch header labeled W1



PLCs



Acquisition



Instruments



Data logger



Power



HMIs



Switches



Motion



Sensors



Converters



Keyboards



SCADA



Telemetry