AC -> DC SWITCHING POWER SUPPLY

LP1500D SERIES

All the patents are held accountable counterfeiting.

Features



Green Power

- Din Rail / Screw Mounting Dual Purpose
- Easy mounting (one-step installation)
- Comply with High Efficiency Power 80Plus Criterion
- "Output Voltage Monitor " Display
- Fan speed control
- 100% burn-in test
- 2 years warranty
- Output modify range: 3V~200VDC
- DIMENSIONS:100(H)*110(D)*90(W)mm

WEIGHTS: 820g

General specifications

INPUT

Input range

Input frequency

Inrush current (25°C)

90~132/180~264VAC(Selectable) 220~380VDC 47~63Hz 20A/110VAC 40A/220VAC

OUTPUT

Hold-up time 13ms Short protection Autorecovery **Over load protection** Automatic power limited **Optional 5V/3A AUX output** for models which output voltage lower than 40VDC

Detail specifications

500 Watts

	MODEL	O/P Volt Adj. ± %	Load(Current) 1			Ripple	Line	Load	Efficiency	0.1/10
			Min.	Rated	Max.	& Noise ₄	REG. 2	REG. 3	Enciency 5	O.V.P
	LP1500D-12M	V : +12V ±10%	0A	37.5A	41.6A	180mV	±1%	±2%	85% Ref.	17.1 ~ 18.6V
	LP1500D-24M	V : +24V ±10%	0A	20.8A	20.8A	240mV	±1%	±2%	85% Ref.	31.4 ~ 34.7V
	LP1500D-36M	V : +36V ±10%	0A	13.9A	13.9A	360mV	±1%	±2%	85% Ref.	47.8 ~ 53.2V
	LP1500D-48M	V : +48V ±10%	0A	10.4A	10.4A	480mV	±1%	±2%	85% Ref.	64.6 ~ 71.4V
	LP2500D1M	V1 : +12V ±10% V2 : +5V	0A 0A	36.25A 3A	41.7A 3A	180mV 40mV	±1% ±1%	±1% ±1%	85% Ref.	17.1 ~ 18.9V 5.8~7.0V
	LP2500D2M	V1 : +12V ±10% V2 : +5V	0A 0A	33.3A 10A	41.7A 20A	180mV 40mV	±1% ±1%	±1% ±1%	85% Ref.	17.1 ~ 18.9V 5.8~7.0V
	LP2500D3M	V1 : +24V ±10% V2 : +5V	0A 0A	20.2A 3A	20.8A 3A	240mV 40mV	±1% ±1%	±1% ±1%	88% Ref.	31.4 ~ 34.7V 5.8~7.0V
	LP2500D4M	V1 : +24V ±10% V2 : +12V	0A 0A	20.0A 1.5A	20.8A 2A	240mV 80mV	±1% ±1%	±1% ±1%	88% Ref.	31.4 ~ 34.7V 15 ~ 18V
	LP2500D5M	V1 : +36V ±10% V2 : +12V	0A 0A	13.38A 1.5A	13.9A 2A	360mV 80mV	±1% ±1%	±1% ±1%	85% Ref.	47.8 ~ 53.2V 15 ~ 18V

México


+ 52 (33) 3854 5975 ventas@logicbus.com www.logicbus.com.mx

USA + 1 (619) 619 7350 saleslogicbus.com www.logicbus.com





LP1500D SERIES AC -> DC SWITCHING POWER SUPPLY All the patents are held accountable counterfeiting.

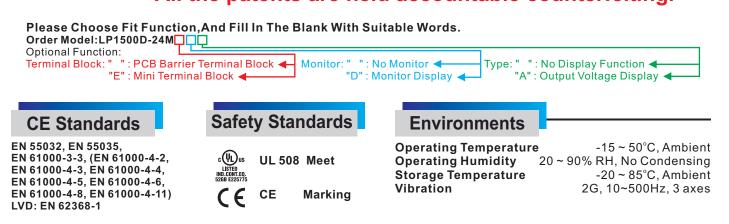

NOTE

- 1. Each output can provide up to maximum load, but total load can not exceed rated output power.
- 2. Line regulation is measured from low line to high line at rated load.
- 3. Load regulation is measured from 20% to 100% of rated load at 220VAC input.
- 4. Ripple & Noise are measured with 20MHz oscilloscope at 220VAC by using a 20cm long 12" twisted pair-wire with a 0.1uF/630V metal capacitor & a 47uF electrolytic capacitor parallel on the test point.
- 5. Efficiency is measured at rated load and 220VAC input. 6. Hold-up time is measured at rated load and 220VAC input.
- 7. With are no CE safety approval.
- 8. With **A** are no Monitor Display ONLY.
- 9. Output Voltage Adjustable is measured on 5% of rated load.
- 10. The product uses metal enclosure for cooling. To ensure product lifespan, a clearance of at least 1 cm at the side of the product, 2 cm at top and bottom of the product should be maintained when installing.
- 11. Reign Power reserve the right to change specifications at any time without notice.

México

+ 52 (33) 3854 5975 ventas@logicbus.com www.logicbus.com.mx



USA + 1 (619) 619 7350 saleslogicbus.com

www.logicbus.com

