


13 Series Moulded Case Current Transformers

DESCRIPTION

A range of compact low cost moulded case current transformers suitable for primary currents from 40A to 50A with built in sealable terminal covers.

APPLICATION

For transforming various primary currents into 5A standard secondary using cables up to 21mm diameter.

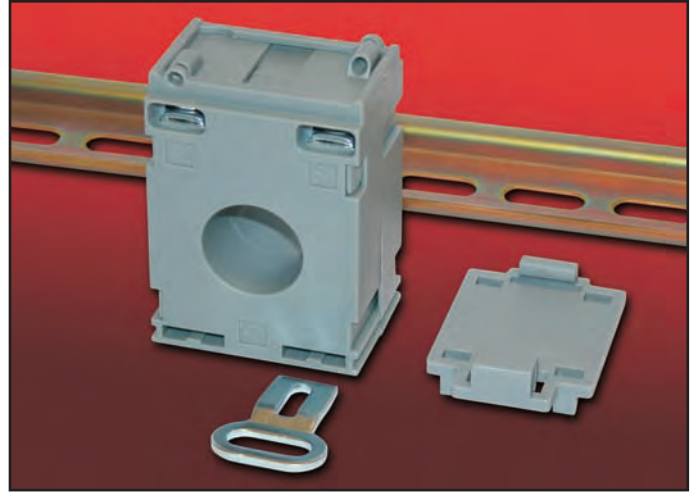

FEATURES

- DIN rail mounting clip supplied.
- Built in sealable terminal covers.
- Mounting feet supplied.
- Narrow width - 45mm.

TECHNICAL SPECIFICATION

- Conforms to IEC185, BS 7626, BSEN 60044-1 and IEC 60044-1.
- Rated system voltage 0.72/3kV.
- Ambient temperature range -30°C to 85°C.
- Continuous current 1.2 x rated current.



Built in sealable terminal covers

RANGE

5A Secondary

40/5A, Class 3, 1 VA - CT132M40/5-1/3

50/5A, Class 3, 1 VA - CT132M50/5-1/3

DIMENSIONS (mm)

