



¡ Tu Sitio de Automatización !



LBMT504500TE

Especificaciones:

Model	LBMT504500TE
Performance specification	
Display	10.4" TFT(211.2×158.4mm)
Resolution	640*480 pixels
Color	65536 colors
Backlight	2 CCFL
Brightness	400cd/m ²
Backlight life	50000 hr.
Touch Panel	4-wire precision resistance network
Processor	32-bit RISC CPU 400 MHz
Memory	8 MB FLASH, 16 MB SDRAM
Recipe memory & RTC	256 KB & RTC
Printer port	1 DB25, Support SPRT SP-DN16PH, HP LaserJet P2014, EPSON LQ 305KT
Ethernet	Yes
Program download	1 USB SLAVE port
COM port	COM0:RS232/RS485-2/RS485-4 COM1:RS232/RS485-2/RS485-4 COM2:RS232
Electrical specification	
Rated power	10.8 W
Rated voltage	DC24V
Input range	DC21 ~DC28V
Power down allowed	<5ms
Insulation resistance	Greater than 50MΩ@ 500V DC
Dielectric strength test	500 VAC 1 minute


info@logicbus.com.mx

www.logicbus.com.mx

Alcalde # 1822 Col. Miraflores C.P. 44270 Guadalajara, Jal. México
 MX 01 (33) 3854-5975 y 3823-4349 USA 001 (858)-869-5401 (Chula Vista, CA. Office)

Structure specification	
Shell color	Deep gray
Shell material	ABS
Dimensions(mm)	310× 230 × 54
Cutout size(mm)	298 × 218
Weight	1.67 Kg
Environment specification	
Operating temperature	0~45°C
Operating humidity	10~90% non-condensing
Storage temperature	-10~60°C
Storage humidity	10~90% non-condensing
Shockproof test	10~25Hz (X, Y, Z direction, 2G, 30 minutes)
Cooling method	Natural air cooling
Certification	
Degree of protection	IP65 (front panel)
CE certification	EN61000-6-2:2005 and EN61000-6-4:2007
FCC compatibility	Complies with FCC Class A

Hardware:

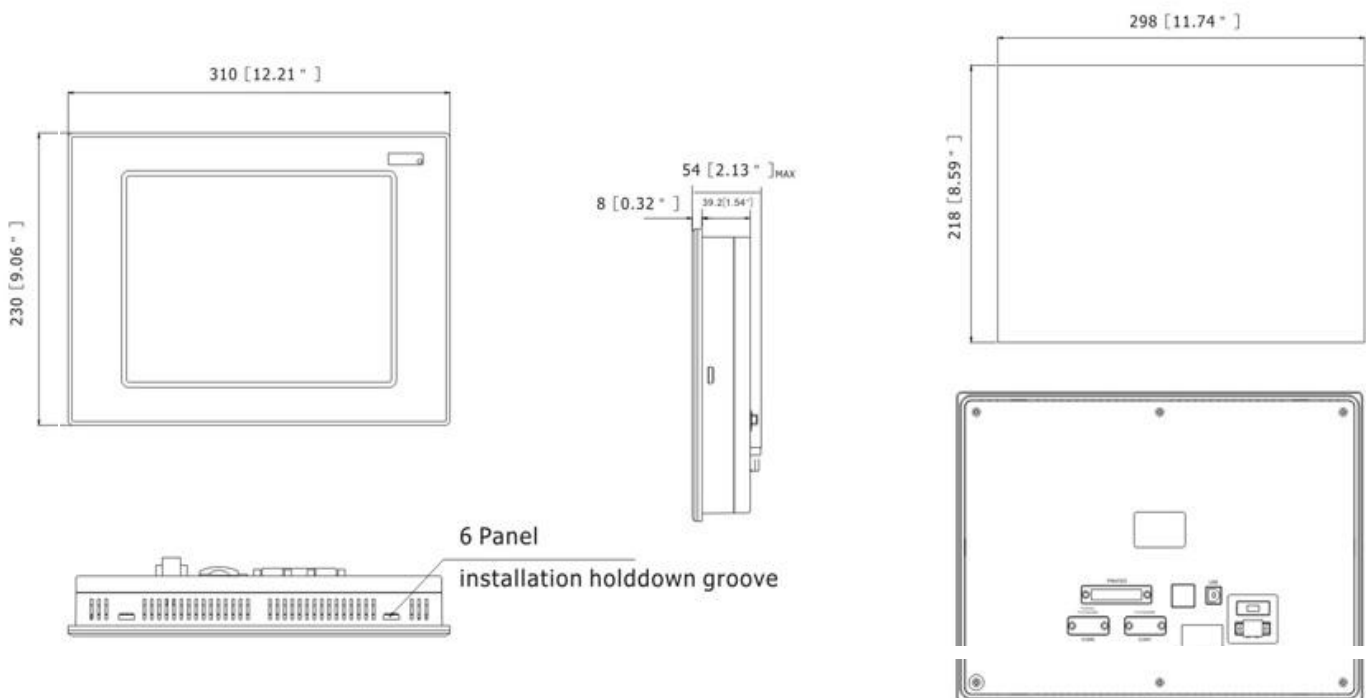

info@logicbus.com.mx

www.logicbus.com.mx

Alcalde # 1822 Col. Miraflores C.P. 44270 Guadalajara, Jal. México
 MX 01 (33) 3854-5975 y 3823-4349 USA 001 (858)-869-5401 (Chula Vista, CA. Office)