


- **65536 True Color TFT LCD**
- **32 Bit, 400MHz RISC CPU**
- **8M FLASH ROM+16M SDRAM**
- **256KB recipe memory, record date easily**
- **Real-Time clock, reserve time for more than 2 years at power off state**
- **8 User defined input keys**
- **3 COM port, supports Simultaneous Communications;RS232/RS422/RS485**



Display	Resolution	Color	Backlight	Brightness	Backlight Life	Processor	Memory
10.1"16:9 TFT(219.6x131.76mm)	800x480 pixels	65,536 Colors	LED	320cd/m ²	5000 hr.	32-bit RISC CPU 400MHz	16M FLASH, 32M SDRAM
Recipe Memory & RTC	Printer Port	Ethernet	Expandable Memory	Program Download	Dimensions	Display Size	Rated Voltage
256KB&RTC	Support	None	1 USB, 1 SD Card	1 USB Slave Port	310x 230 x 58 mm	298 x 218 mm	24 VDC
Rated Power	Input Range	Power Down Allowed	Insulation Resistance	Dielectric Strength Test	Shell Color	Shell Material	Weight
12 W	DC21-DC28V	<5ms	>50Mohms@500VDC	500 VAC 1 Minute	Black	ABS	2Kg

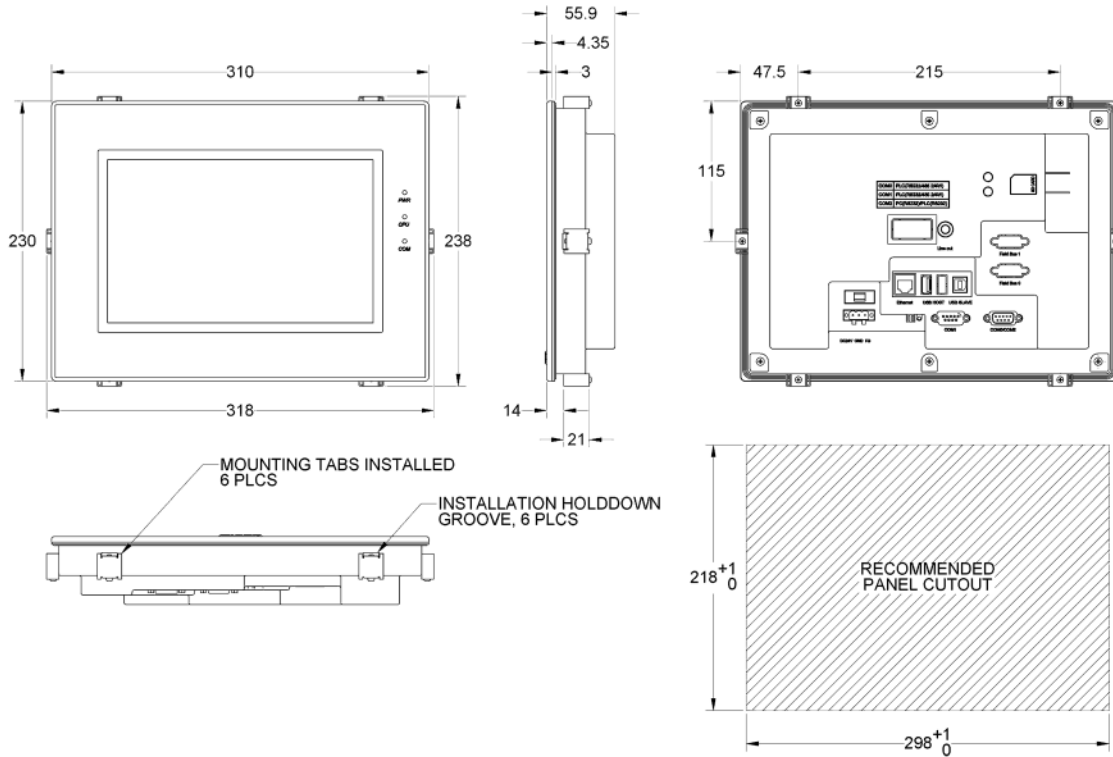