


DESCONTINUADO

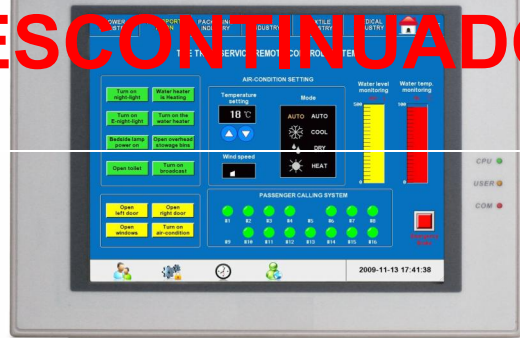

LBMT505420T Series

Especificaciones:

Model	505420T	505420T-DP	505420T-CAN	505420T-MPI
Performance specification				
Display	7.5" TFT(162.2 × 121.7 mm)			
Resolution	640*480 pixels			
Color	65536 colors			
Backlight	1CCFL			
Brightness	350cd/m ²			
Backlight life	50000 hr.			
Touch Panel	4-wire precision resistance network			
Processor	32-bit RISC CPU 520 MHz			
Memory	16 MB FLASH, 32 MB SDRAM			
Recipe memory & RTC	512 KB & RTC			
Expandable memory	SD Card, U Disk			
Printer port	Connect a printer with a USB port via USB HOST port.			
Ethernet	10/100 Base-T			
Audio interface	1 Audio output interface			
Program download	1 USB SLAVE port			
COM port	COM0:RS232/RS485-2/RS485-4 COM1:RS232/RS485-2/RS485-4 COM2:RS232			
Video interface	None			
USB Host	A Mouse, Keyboard and Printer, etc. which can be extended by USB port.			
Communication module extending	No support	PROFIBUS-DP expansion board supported	CANOPEN expansion board supported	MPI expansion board supported
Electrical specification				
Rated power	10.8 W			
Rated voltage	DC24V			
Input range	DC21 ~DC28V			

info@logicbus.com.mx


www.logicbus.com.mx

Alcalde # 1822 Col. Miraflores C.P. 44270 Guadalajara, Jal. México
 MX 01 (33) 3854-5975 y 3823-4349 USA 001 (858)-869-5401 (Chula Vista, CA. Office)

Power down allowed	<3ms
Insulation resistance	Greater than 50MΩ@ 500V DC
Dielectric strength test	500V AC 1 minute
Structure specification	
Shell color	Light-grey
Shell material	ABS
Dimensions(mm)	235 x 172 x 57.9
Cutout size(mm)	224 x 161
Weight	1.27 Kg
Environment specification	
Operating temperature	0~45°C
Operating humidity	10~90% non-condensing
Storage temperature	-10~60°C
Storage humidity	10~90% non-condensing
Shockproof test	10~25Hz (X, Y, Z direction, 2G, 30 minutes)
Cooling method	Natural air cooling
Certification	
Degree of protection	IP65 (front panel)
CE certification	EN61000-6-2:2005 and EN61000-6-4:2007
FCC compatibility	Complies with FCC Class A

DESCONTINUADO

Hardware:

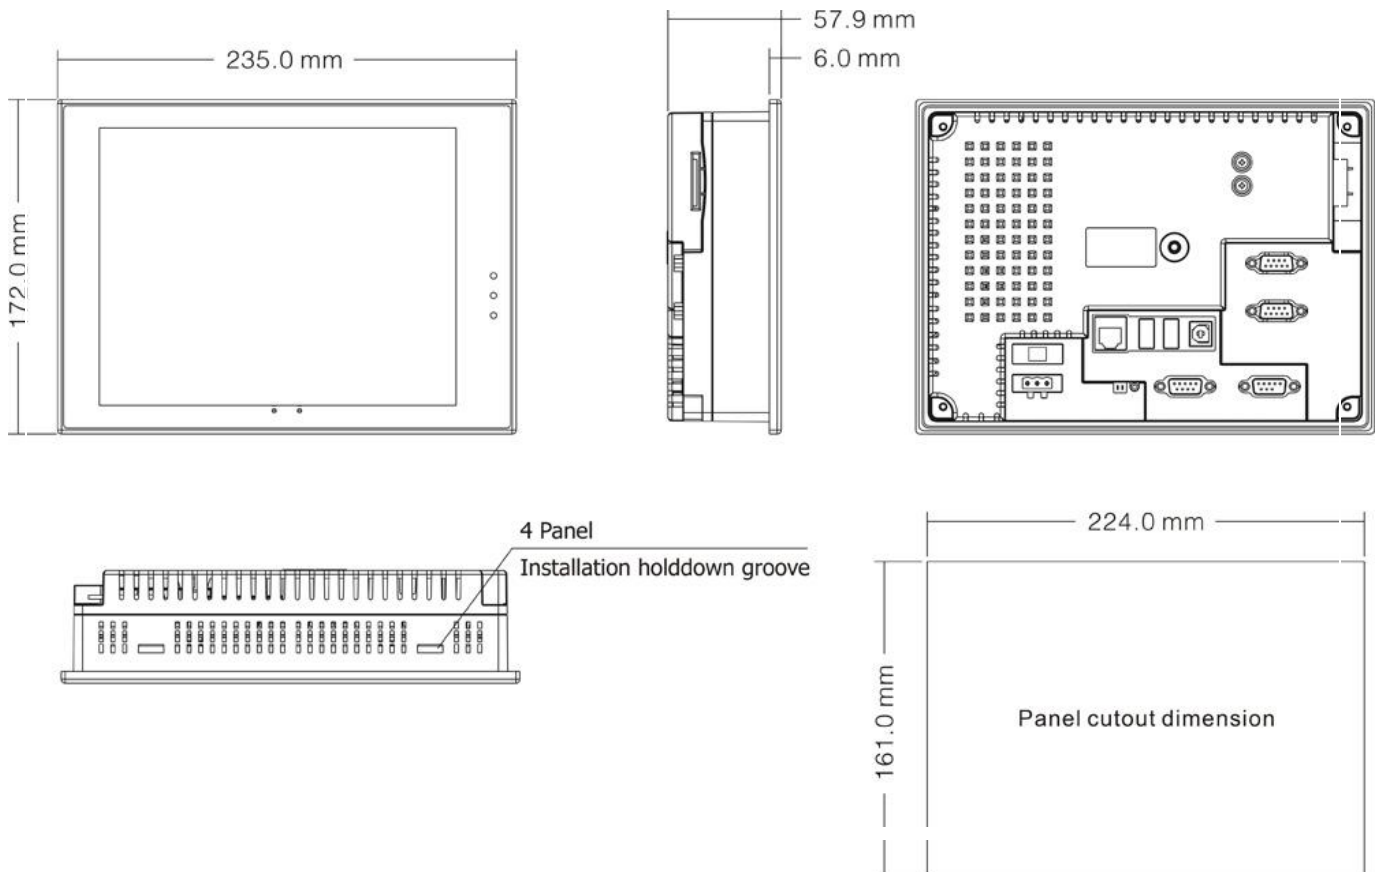

info@logicbus.com.mx

www.logicbus.com.mx

Alcalde # 1822 Col. Miraflores C.P. 44270 Guadalajara, Jal. México
 MX 01 (33) 3854-5975 y 3823-4349 USA 001 (858)-869-5401 (Chula Vista, CA. Office)