




Power down allowed	<3ms
Insulation resistance	Greater than 50MΩ@ 500V DC
Dielectric strength test	500 VAC 1 minute
<b>Structure specification</b>	
Shell color	Light-grey
Shell material	ABS
Dimensions(mm)	310.6 × 230.6 × 55.7
Cutout size(mm)	298 × 218
Weight	2 Kg
<b>Environment specification</b>	
Operating temperature	-20~45°C
Operating humidity	10~90% non-condensing
Storage temperature	-10~60°C
Storage humidity	10~90% non-condensing
Shockproof test	10~25Hz (X, Y, Z direction, 2G, 30 minutes)
Cooling method	Natural air cooling
<b>Certification</b>	
Degree of protection	IP65 (front panel)
CE certification	EN61000-6-2:2005 and EN61000-6-4:2007
FCC compatibility	Complies with FCC Class A

### Hardware:

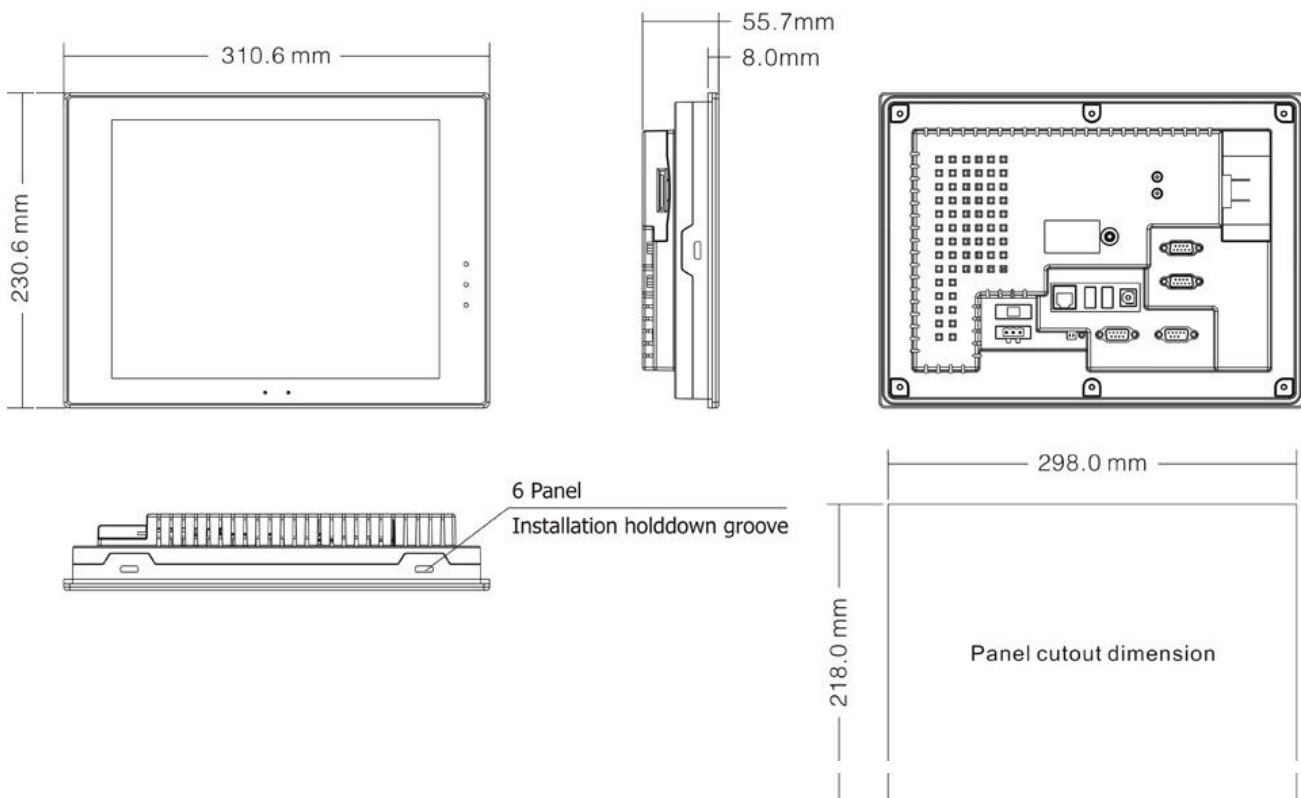

[info@logicbus.com.mx](mailto:info@logicbus.com.mx)

[www.logicbus.com.mx](http://www.logicbus.com.mx)

Alcalde # 1822 Col. Miraflores C.P. 44270 Guadalajara, Jal. México  
 MX 01 (33) 3854-5975 y 3823-4349 USA 001 (858)-869-5401 (Chula Vista, CA. Office)