


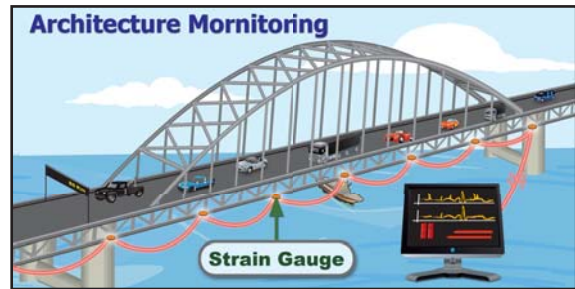

2.2.6. Strain Gauge Input Module

■ Strain Gauge Introduction

A strain gauge is a resistive sensor. The measurement of strain is usually made using a Wheatstone bridge circuit with excitation voltage. The variation in strain can be calculated based on the measured voltage. The resistance of the gauge varies when the gauge is compressed or stretched. With the characteristic, it can be applied to measure stress or the growth of the crack or movement in buildings, foundations, and other structures to ensure the safety.

■ Applications



Strain Gauge Input Module		
Model Name	I-7016(D) M-7016(D)	I-7016P(D)
Pictures		
Strain Gauge Input		
Channels	2	1
Wiring	4 wire	6 wire
★ Sensor Type	Full-Bridge	
Resolution	16-bit	
★ Accuracy	±0.05%	
★ Sampling Rate	2/10 Hz	10 Hz
Input Impedance	20 MΩ	
★ Individual Channel Configuration	-	
★ Overvoltage Protection	±5 Vdc	
Open Wire Detection	-	
Long Distance Measurement	-	Yes
Excitation Voltage Output		
Channels	1	
Range	0 ~ 10 V	
Max. Load Current	40 mA	
Resolution	16-bit	
Accuracy	±0.05%	
Power-on Value	Yes	
Digital Input		
Channels	1	
Contact	Dry	
Sink/Source (NPN/PNP)	Source	
On Voltage Level	Close to GND	
Off Voltage Level	Open	
★ Counter (50 Hz, 16-bit)	Yes	
Input Impedance	3 KΩ	
Overvoltage Protection	±30 Vdc	
Digital Output		
Channels	4	
Type	Open Collector	
Sink/Source (NPN/PNP)	Sink	
Load Voltage	+3.5 ~ 50 Vdc	
Max. Load Current	30 mA/Channel	
★ Power-on Value	Yes	
★ Safe Value	Yes	
System		
★ Dual Watchdog	Yes	
ESD (IEC 61000-4-2)	-	
EFT (IEC 61000-4-4)	-	
Intra-Module Isolation, Field-to-Logic	3000 Vdc	
Power Input	10 ~ 30 Vdc	
Power Consumption	2.4 W; 3.0 W for (D) version	2.4 W; 3.0 W for (D) version