
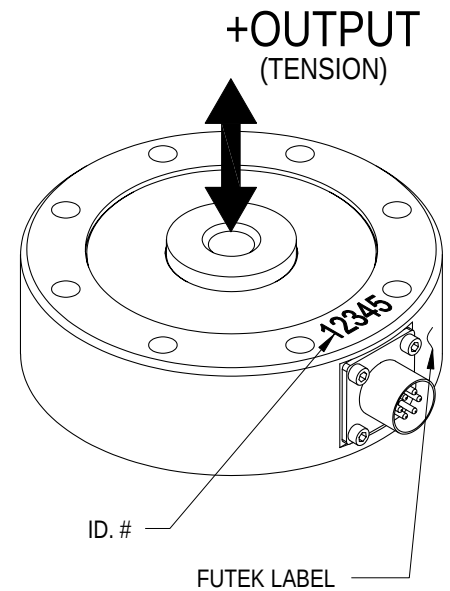


Drawing Number: FI1177			
INCH [mm]		R.O.= Rated Output	
WIRING CODE (CC1)			
+Excitation	-Excitation	+Signal	-Signal
RED PIN 'A'	BLACK PIN 'B'	GREEN PIN 'C'	WHITE PIN 'D'
+Sense	-Sense		
ORANGE PIN 'E'	BLUE PIN 'F'		

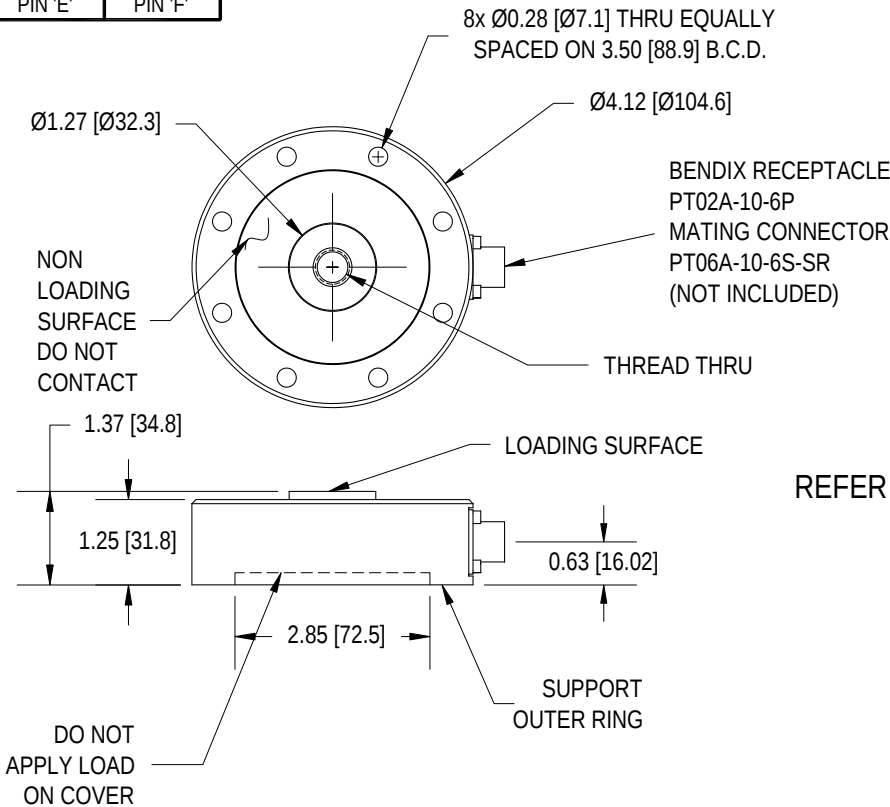

REFER TO LCF456 FOR TENSION BASE VERSION

SPECIFICATIONS:

RATED OUTPUT	1 mV/V nom.
SAFE OVERLOAD	150% of R.O.
ZERO BALANCE	±1% of R.O.
EXCITATION (VDC OR VAC)	20 MAX
BRIDGE RESISTANCE	700 Ω nom.
NONLINEARITY	±0.1% of R.O.
HYSTERESIS	±0.2% of R.O.
NONREPEATABILITY	±0.02% of R.O.
CREEP	±0.02% of LOAD
TEMP. SHIFT ZERO	±0.001% of R.O./°F [0.0018% of R.O./°C]
TEMP. SHIFT SPAN	±0.002% of LOAD/°F [0.0036% of LOAD/°C]
COMPENSATED TEMP.	60 to 160°F [15 to 72°C]
OPERATING TEMP.	-60 to 200°F [-50 to 93°C]
WEIGHT	ANODIZED ALUMINUM: 1.3lb [0.6kg], 17-4PH S.S.: 3.5lb [1.6kg]
DEFLECTION	0.002 to 0.005 [0.05 to 0.13] nom.
CONNECTOR: 6 Pin BENDIX Receptacle (PT02A-10-6P)	
ACCESSORIES AND RELATED INSTRUMENTS AVAILABLE	
CALIBRATION (STD)	5 pt. COMPRESSION; 200K Ω SHUNT CAL. VALUE
CALIBRATION TEST EXCITATION	10 VDC

HIGHER SPECIFICATIONS OF 0.05% AVAILABLE
CONTACT FACTORY

Stock #	CAPACITY lb	N	THREAD	MATERIAL
FSH01488	250	1112	5/8-18	ANODIZED ALUMINUM
FSH02240			M16 X 2	
FSH01489	500	2224	5/8-18	
FSH02241			M16 X 2	
FSH01490	1K	4448	5/8-18	17-4PH S.S.
FSH02242			M16 X 2	
FSH01492	2.5K	11120	5/8-18	
FSH02243			M16 X 2	
FSH01493	5K	22240	5/8-18	
FSH02244			M16 X 2	

OTHER AVAILABLE RECEPTACLES & MATING CONNECTORS

BENDIX RECEPTACLE (PC04E-10-6P)
BENDIX MATING CONNECTOR (PC06E-10-6S-SR)

BENDIX RECEPTACLE (PT02H-10-6P)
BENDIX MATING CONNECTOR (PT06A-10-6S-SR)