


6 Pin Binder To Cable Assembly

MATES WITH FUTEK MODEL TRD300, TRS300, TRH300

Drawing Number: FI1102-A

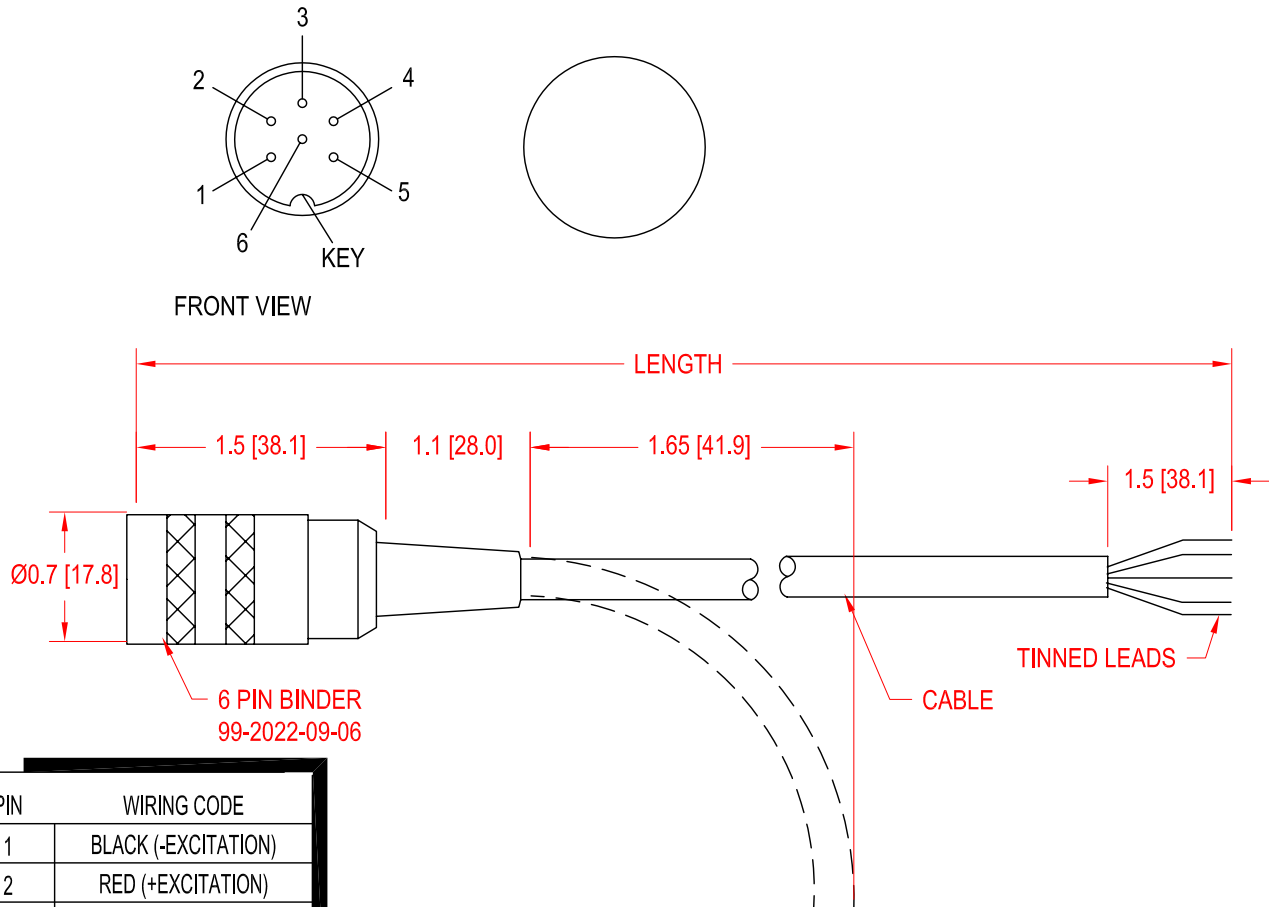

PIN	WIRING CODE
1	BLACK (-EXCITATION)
2	RED (+EXCITATION)
3	NO CONNECTION
4	GREEN (+SIGNAL)
5	WHITE (-SIGNAL)
6	ORANGE (SHUNT CAL)
	SHIELD (FLOATING)

ITEM #	LENGTH	CABLE	SPECIFICATIONS
FSH02120	5 ft	28 AWG, 6 CONDUCTOR BRAIDED SHIELDED POLYURETHANE DIAMETER: 0.165 [4.2] CABLE MINIMUM BEND RADIUS: 1.65 [41.9]	TEMP: -40° to 176°F -40° to 80°C IP RATING IP50
FSH02023	10 ft		
FSH02122	20 ft		
FSH02123	30 ft		
FSH02124	50 ft		
FSH02125	100 ft		



PLCs



Acquisition



Instruments



Data logger



Power



HMIs



Switches



Motion




Sensors



Converters



Keyboards



SCADA



Telemetry