

R15L600-PCC3(HB)

15" Multi-Touch Chassis Display



KEY FEATURES

- 15" 1024 x 768 Resolution with P-Cap Multitouch
- VGA input and HDMI input
- Stylish and elegant design
- A true flat, easy-to-clean front surface with edge-to-edge design

INTRODUCTION

Winmate Custom Display (Standalone) Series offers versatile and high-performance solutions for various industrial and commercial applications. Available in sizes from 7" to 43", these displays feature optional high brightness up to 1000 nits for superior visibility, even in bright environments. Designed with Projected Capacitive (P-Cap) touch and front IP65 water and dustproof protection, they ensure durability and reliability. With a variety of inputs, including VGA and HDMI, along with extensive customization options, these displays provide flexibility, functionality, and a stylish, elegant design tailored to your needs.

SPECIFICATIONS

Display

Touch / Glass	Projected Capacitive Multi Touch Screen Protection Glass (Optional) Anti-glare Coating (Optional)	Resolution	1024x768
Size	15.0 inches	Contrast Ratio	2000:1
Panel Brightness	300 nits 1000 nits(Optional)	Display Color	16.2M Colors
View Angles	88,88,88,88	Active Area	304.1x228.1 mm

Environment

Operating Humidity	10% to 90% (Non-Condensing)	Operating Temperature	0~50°C
Storage Temperature	-20°C~60°C	Shock	MIL-STD-810G Method 516.6
Vibration	MIL-STD-810G Method 514.6	IP rating	Front IP65

Certification

Certification	CE, FCC
----------------------	---------

IO Ports

USB Port	1 x USB for Touch Screen	Video	1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional)
Audio	Audio line in (3.5mm) (Optional) 2 x Speaker (Optional)		

Accessory

Accessory	1 x VGA cable 1 x HDMI cable	Optional Accessory	Remote Controller (Optional,Varies by product)
------------------	---------------------------------	---------------------------	--

100~240V AC to DC Adapter
 Power Cord
 Manual
 VESA screws(Varies by product)


Power

Power Rating 12V DC in
 24V DC in (optional)

Control

Button 5 Keys: -, +, Power, Esc, Enter

DIMENSIONS UNIT:MM

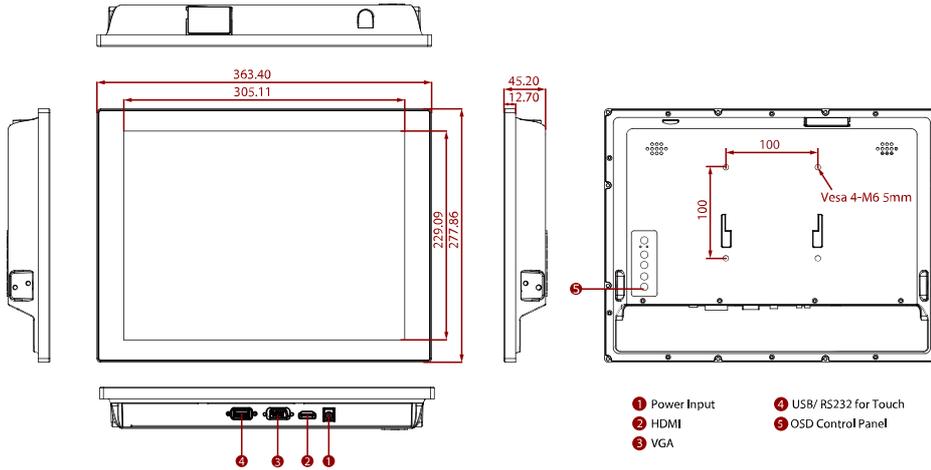

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.